



ANATOL

www.anatol.com

CUBE

Screen Drying Cabinet

Anatol's Cube screen drying cabinet offers a climate-controlled environment for drying screens efficiently after reclamation and coating:


- Air circulation and precise digital temperature controls allow you to dry screens and have them ready for production quickly
- Holds up to 9 screens at a time on stainless steel shelves angled to drain excess water and emulsion
- Built-in air filtration system ensures the cabinet stays free of dust and debris, keeping your screens clean while drying
- Adjustable hold min screen size 6"x8" to a max screen size 26"x36"



CUBE



Eleven fans provide air circulation in the drying chamber for fast drying

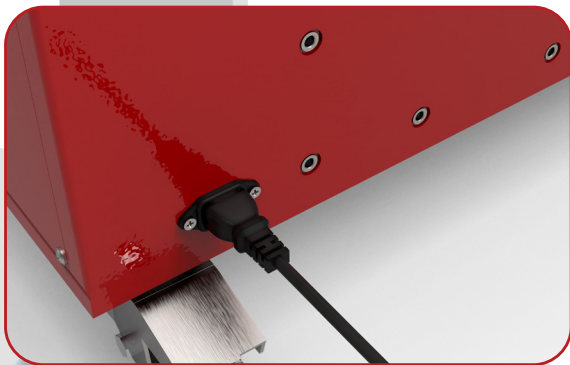

Power cord disconnects quickly for movement around your shop




Design and Construction

- Eleven fans provide efficient air circulation throughout the chamber
- Built-in air filtration system keeps screens free of dust and debris while drying
- Heavy-duty locking casters allow you to easily move the cabinet around your shop
- Angled stainless steel shelves drain excess water
- Minimal contact between the screens and shelves
- Holds up to 9 screens at a time
- Cabinet doors open a full 180 degrees



Control Panel

- Quick activation
- Digital temperature controls from 85°F - 120°F (29°C - 49°C)
- Digital timer with audible signal upon completion

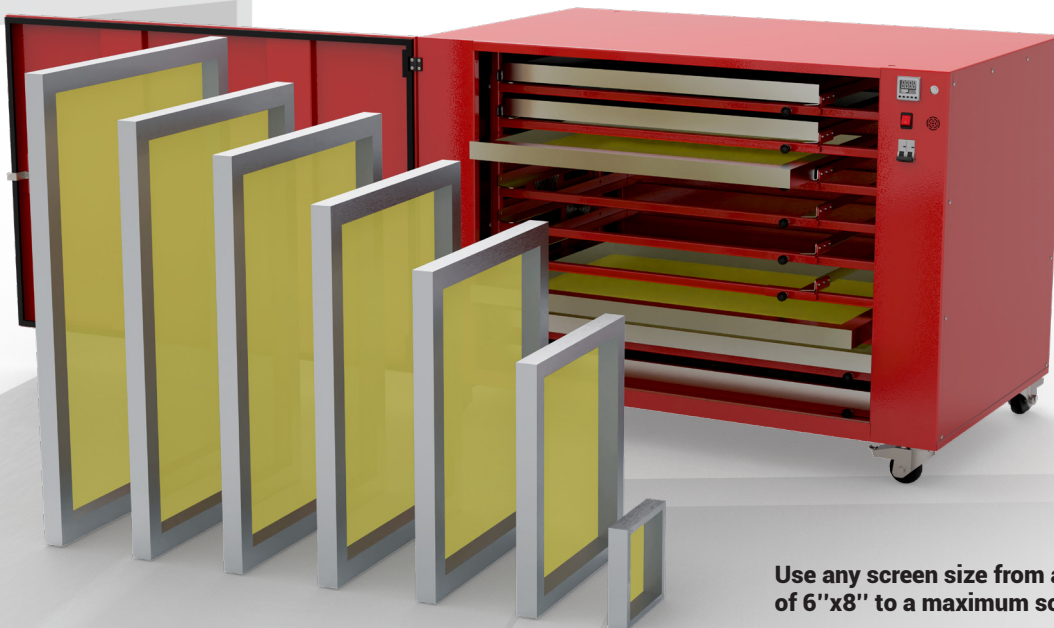


Use any screen size from a minimum of 6"x8" to a maximum screen size of 26"x36"



ANATOL

SCREEN DRYING CABINET

STANDARD FEATURES

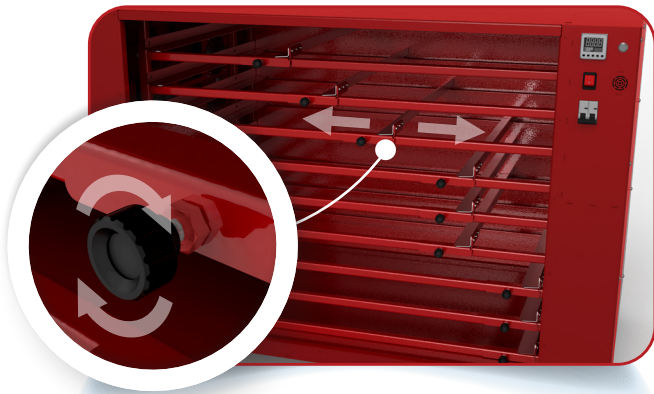

Choose your own screens size with a convenient sliding shelf



Optional brackets for fixing the Quick Light and the air pump




Cube function

- Quick drying of screens
- The possibility of simultaneous installation of screens of different sizes
- Signal notification at the end of work



Easy-to-use digital time and temperature controls

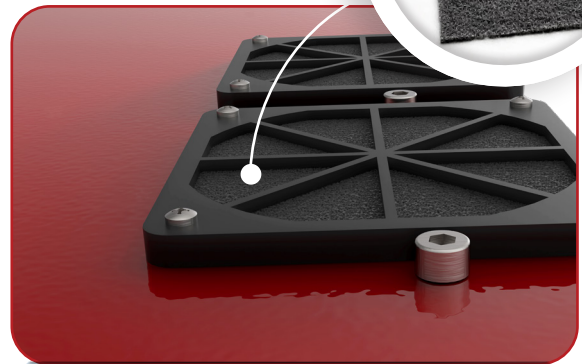

Air filtration system keeps the air inside the chamber clean and free of dust and debris

OVERALL DIMENSIONS	TEMPERATURE RANGE	MAXIMUM POWER	WEIGHT	POWER SUPPLY
49.6"x32.5"x34.6" (126cm x 82.6cm x 88cm)	85-120°F (29-49°C)	1250 W	291lb (132kg)	208-240V, 1Ph, 50/60Hz, 8A 110V, 1Ph, 60Hz, 14A
MAX SCREEN FRAME THICKNESS	MAX SCREENS SIZE TO INSTALL	CAPACITY		
2" (5.8cm)	26"x36" 66.0 x 91.4 cm	9 screens		

Two-Year Limited Warranty

Every effort has been made to ensure the accuracy of the promotional information included in this brochure. Specifications are subject to change. Anatol Equipment Manufacturing Co. and its subsidiaries, if any, expressly disclaim any liability for damages, consequential or incidental, resulting from the purchase, transportation, installation, or use of any products based upon information contained within this brochure. Any rights or remedies are limited solely to those provided in writing by Anatol Equipment Manufacturing Co. at the time of sale.

Anatol Equipment Manufacturing Co.
1429 S Shields Dr Waukegan, IL 60085 USA
1.847.367.9760 sales@anatol.com

