



www.anatol.com

# CUBE

## Screen Drying Cabinet

**Anatol's Cube screen drying cabinet offers a climate-controlled environment for drying screens efficiently after reclamation and coating:**

- Air circulation and precise digital temperature controls allow you to dry screens and have them ready for production quickly
- Holds up to 10 screens at a time on stainless steel shelves angled to drain excess water and emulsion
- Built-in air filtration system ensures the cabinet stays free of dust and debris, keeping your screens clean while drying
- Adjustable to hold 20"x24", 21"x28", 23"x31", 23"x33" or 26"x36" screens





## STANDARD FEATURES




### Design and Construction

- Ten fans provide efficient air circulation throughout the chamber
- Built-in air filtration system keeps screens free of dust and debris while drying
- Heavy-duty locking casters allow you to easily move the cabinet around your shop
- Stainless steel shelves angled to drain excess water
- Minimal contact between the screens and shelves
- Holds up to 10 screens at a time
- The door can be opened 180 degrees



### Control Panel


- Quick activation
- Digital temperature controls from 90°F - 120°F (32°C - 49°C)
- Digital timer with audible signal at completion

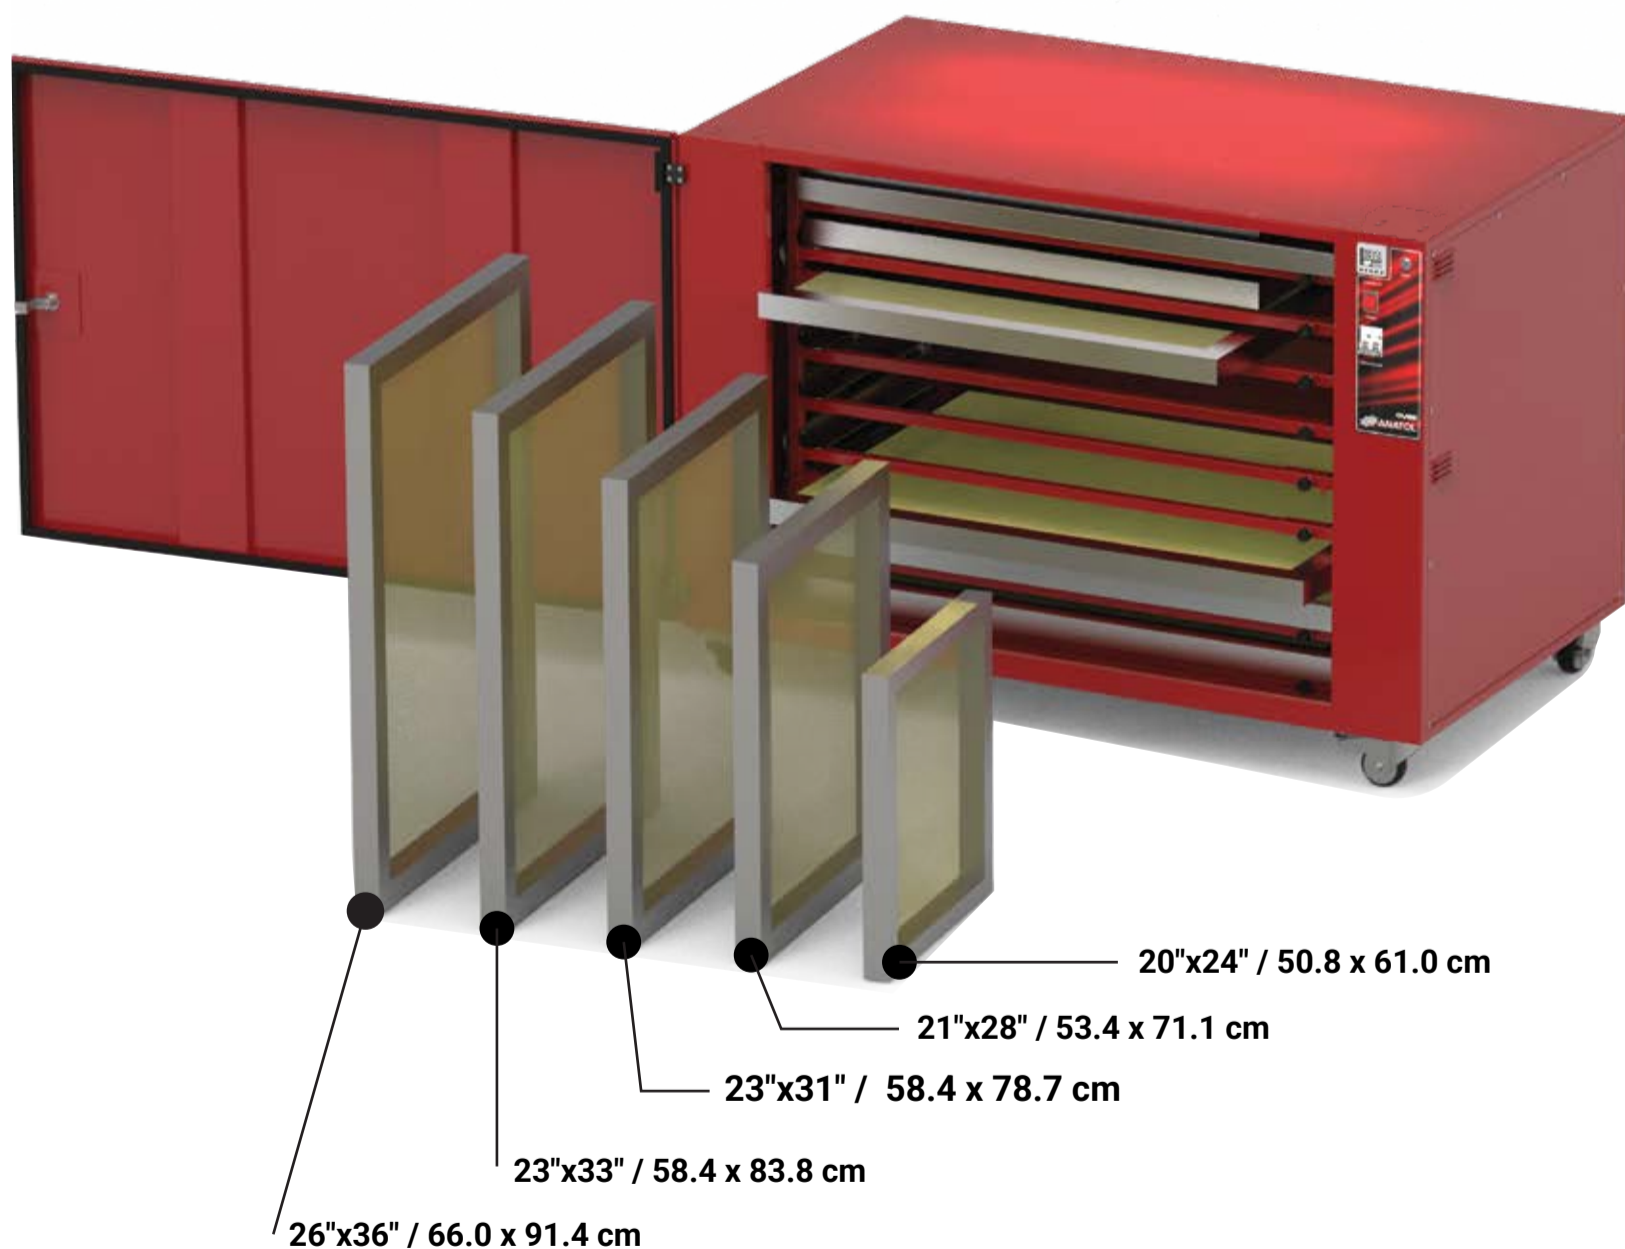

## STANDARD FEATURES



Easy-to-use digital time and temperature controls

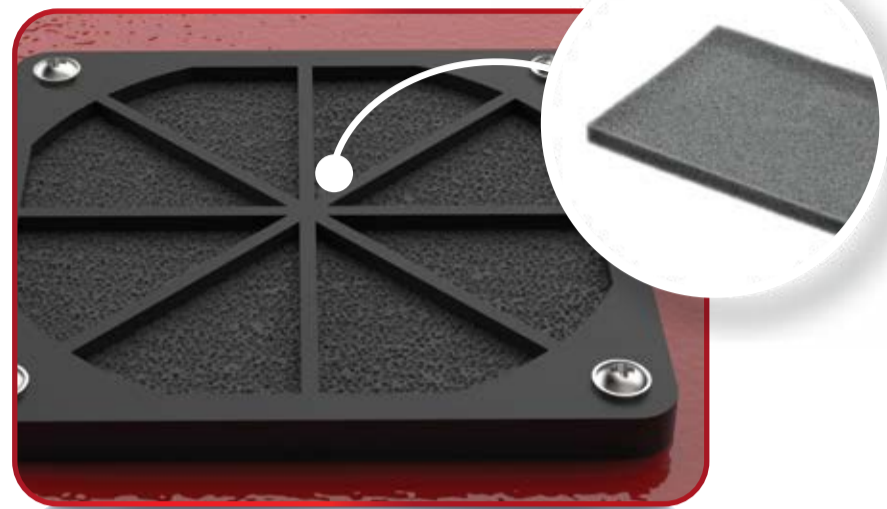

Air filtration system keeps the air inside the chamber clean and free of dust and debris

### CUBE Specifications

	Length	Width	Height
<b>Overall Dimensions</b>	49.6" 126cm	32.5" 82.6cm	34.6" 88cm
<b>Screen Sizes</b>	20"x24" / 50.8 x 61.0 cm		
	21"x28" / 53.4 x 71.1 cm		
	23"x31" / 58.4 x 78.7 cm		
	23"x33" / 58.4 x 83.8 cm		
	26"x36" / 66.0 x 91.4 cm		
<b>Maximum Screen Frame Thickness</b>	2"(5.8cm)		
<b>Capacity</b>	10 screens		
<b>Maximum Power</b>	1250 W		
<b>Power Supply</b>	230V, 1Ph, 50Hz, 7.7A 110V, 1Ph, 50Hz, 13.6A		
<b>Temperature Range</b>	85°F - 120°F (29°C - 49°C)		
<b>Air Flow</b>	970 CFM - 230 V 950 CFM - 110 V		
<b>Weight</b>	266.8 lb (121kg)		

#### Two-Year Limited Warranty

Every effort has been made to ensure the accuracy of the promotional information included in this brochure. Specifications are subject to change. Anatol Equipment Manufacturing Co. and its subsidiaries, if any, expressly disclaim any liability for damages, consequential or incidental, resulting from the purchase, transportation, installation, or use of any products based on information contained within this brochure. Any rights or remedies are limited solely to those provided in writing by Anatol Equipment Manufacturing Co. at the time of sale.