



www.anatol.com

QUIK-KOTE

Automatic Emulsion Coating Machine

Shorten your screen prep time and coat more consistently for higher quality prints

- Holds one or two screens at one time
- Compatible with screen frame sizes of 18" x 19" up to 26" x 43" (two screens) or 52" x 45" (one screen)

- Anatol's Quik-Kote automatic emulsion coating machine takes the work out of coating screens and allows you to coat more consistently than ever, improving your print quality. Coat one or two screens at a time to maximize your productivity. The scoop coaters are lifted with servo motors, ensuring a smooth, even coating of emulsion to create stencils of uniform thickness. Lay down more consistent ink deposits than you can by coating manually, resulting in higher quality prints.







Heavy-Duty Construction

- High quality pneumatic cylinders with automatic braking ensure smooth and accurate movement for consistent operation and even coating
- Scoop coaters are lifted with servo motors for smooth, precise and reliable operation
- Aluminum scoop coaters feature unique easy-to-clean design
- High quality, durable steel screen locks are adjustable for a variety of different screen frame sizes and thicknesses to ensure a firm hold and even emulsion coating
- Compact footprint saves space in your shop



Fast, Consistent Operation

- Quick, even and consistent automatic coating at an affordable price point
- Most productive coating machine on the market-can coat one or two screens at a time
- Uniform scoop coater pressure ensures a smooth, even coating of emulsion on the screen

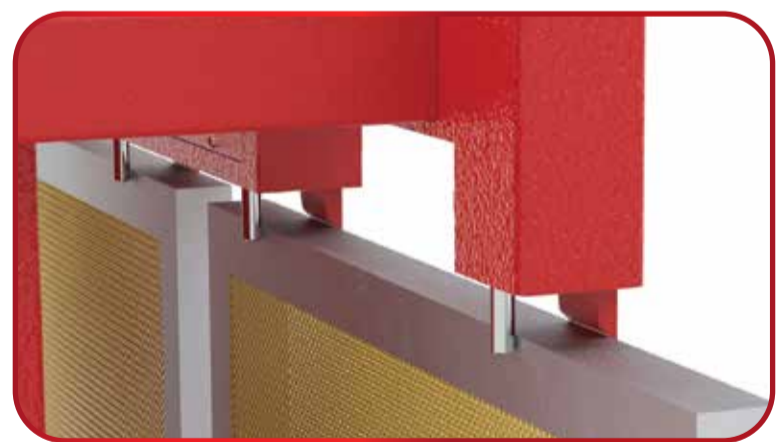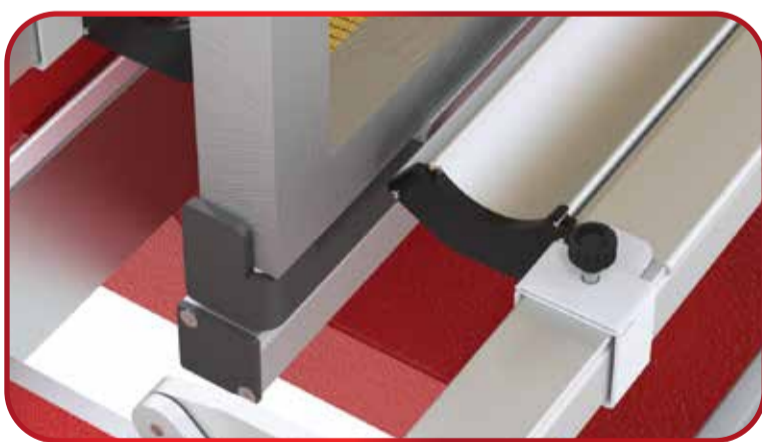

Screen holders are adjustable to accommodate a wide variety of frame sizes and thicknesses

QUICK-COAT




Intuitive Control Interface

- Easy-to-use 7" touchscreen control panel with intuitive software gives you full control over the machine
- Machine automatically detects when screens are loaded and displays an error if the screens are loaded improperly
- Save and recall up to 15 different programs



User-friendly touchscreen control panel

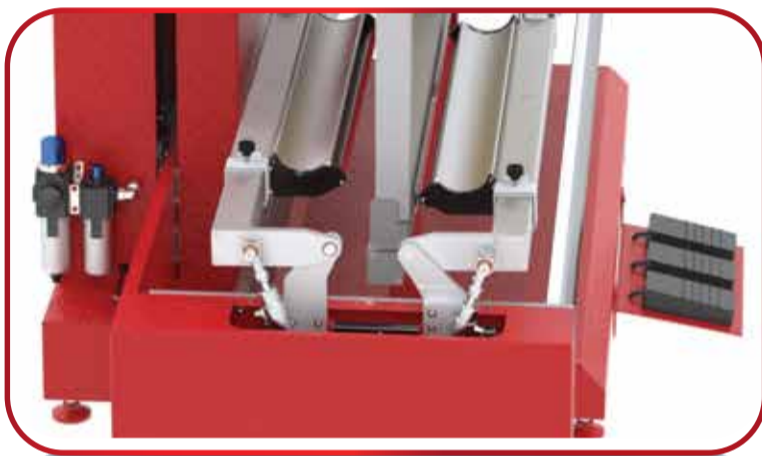

Uniform scoop coater pressure ensures a smooth, even coating of emulsion on the screen



Clamp the screen in place with the locking system by pressing the pedals

| | |
|--|--|
| DIMENSIONS | 67.5" x 77" x 34" (171.5cm x 195.5cm x 86.4cm) |
| WEIGHT | 507lb (230kg) |
| COMPATIBLE SCREEN SIZE | 18" x 19" up to 26" x 43" (two screens) or 52" x 45" (one screen) (45.7cm x 48.2cm up to 66cm x 109cm) or (132cm x 114.3cm) |
| COMPATIBLE SCREEN FRAME THICKNESS | 0.75" x 0.75" up to 1.5" x 1.5" (2cm x 2cm up to 3.8cm x 38cm) |
| AIR PRESSURE | 102 PSI (7 bar) |
| ELECTRICAL REQUIREMENTS | 1ph, 208-240V, 50/60Hz, 4A Max Power: 850W |

Two-Year Limited Warranty

Every effort has been made to ensure the accuracy of the promotional information included in this brochure. Specifications are subject to change. Anatol Equipment Manufacturing Co. and its subsidiaries, if any, expressly disclaim any liability for damages, consequential or incidental, resulting from the purchase, transportation, installation, or use of any products based on information contained within this brochure. Any rights or remedies are limited solely to those provided in writing by Anatol Equipment Manufacturing Co. at the time of sale.